


# P-FA Field Installable Connectors

## Features:

- No electricity required
- No special tool needed
- No epoxy, no polishing
- Less than 2 min. termination
- Removable and reusable

## Applications:

- Local Area Network(LAN)
- Wide Area Network(WAN)
- Intra-Building

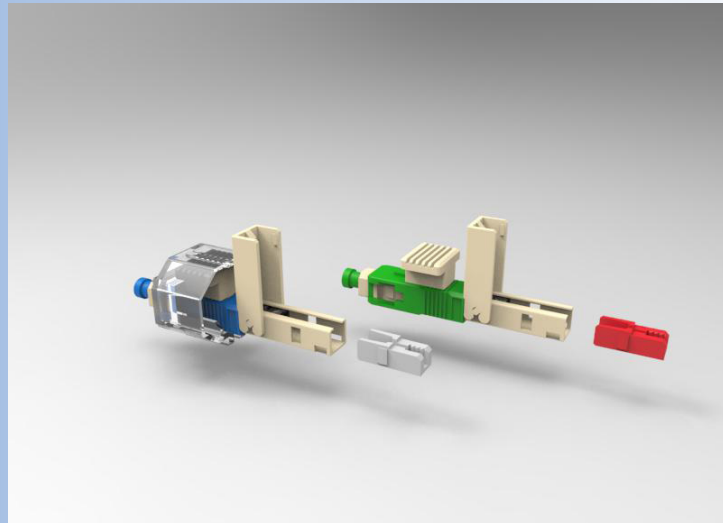

## Performance Specifications:

ITEM		Unit	Specification	
Connector Type			SC/PC	SC/APC
Insertion Loss	Typical	dB	0.3	0.3
	Max	dB	0.4	0.4
Return Loss	Min	dB	40	50

## Ordering Information:

P - FA -   - A   -   S -   - 01

### Connector Type

SC SC/PC AS SC/APC

### Fiber Type

A Singlemode

### Cable Type

2 2.0mm Drop cable F Flat Cable (3.1x2.0mm)  
Fixed holder  
Red 2.0mm round cable use Gray 3.0 mm round cable use

### Polishing Type

CX Convex AG Angle

### Grade

S Super Grade

### Hood Color

BU Blue  
GN Green